# Powder Coating Oven With Overhead Conveyor

## COLO-2447



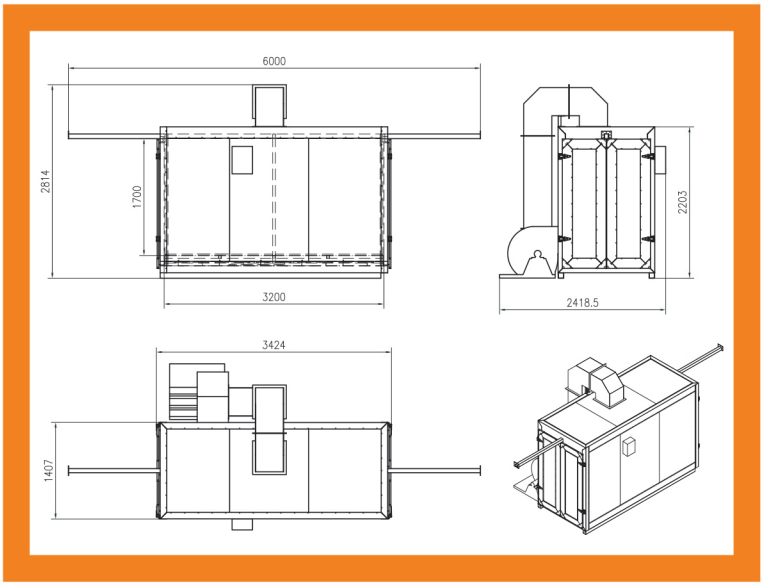


| | | | |
|---|---|---|---|
| **Worksize dimensions** | W1200*H1700*D3200(mm) | **Temperature max** | 250℃ |
| **Overall dimensions** | W1407*H2203*D3424(mm) | **Ventilation performance** | 805-1677m3/h |
| **Power supply** | Electric/ 40kw | **Fan motor power** | 2.2kw |
| **Voltage/Frequency** | As required | **Circulation/ Air flow** | Vertical Variable through holes on the walls |
| **Warm-up time** | 15-30 min(180℃) | **Transportation** | Trolley on top |
| **Temperature stability** | ＜±3-5℃ | **Warranty** | 12 months |





# Gas / LPG / diesel fired powder coating oven





Industrial curing batch oven.
front and back door,heat Source:LPG

## Gas or Diesel as requested
## Colo-0813

(W800mm x H1500mm x D3000mm)

- Precise temperature control, furnace tolerance of +/- 5 degrees Celsius. Indirect heating system with a heat exchanger.
- Hot air is transferred from the bottom up.
- Heat exchangers used in seamless steel tubes 8x8 array, use the combustion liner 310S stainless steel seamless pipe thickness of 3-4mm.
- Closed-round clean efficient heat circulation system.



# Gas / diesel / LPG fired powder coating oven



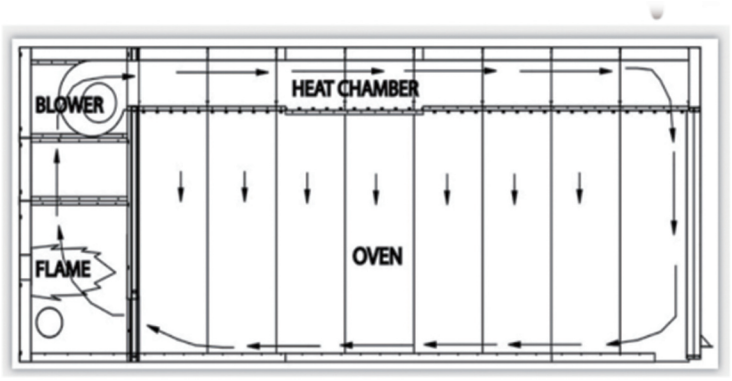




## COLO-3210

Burner can be put in the side or top place

trolley designed as request

Exported into worldwide

Italy imported burner

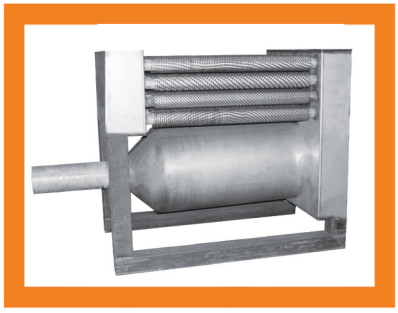

exchange heater



burner



motor

| Model | Worksize dimensions W • H • D mm | Fans amount | Burner power | Heating power | Nominal voltage | motor power |
|---|---|---|---|---|---|---|
| Colo-0813 | W800 H1500 D3000 | 1 pcs. | 100,000cal | 380V/220 | 380V/220 | 3kW |
| Colo-1732 | W1650 H1700 D3200 | 1 pcs. | 10,0000cal | 380V/220 | 380V/220 | 4kW |
| Colo-3210 | W2000 H1900 D3100 | 1 pcs. | 10,0000cal | 380V/220 | 380V/220 | 4KW |
| Colo-4772 | W1606 H2060 D4797 | 1 pcs | 20,0000 cal | 380V/220 | 380V/220 | 5.5KW |